



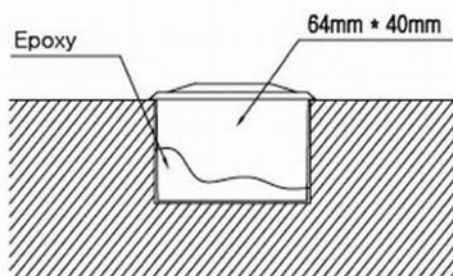

MS- 6040

DIMENSIONS

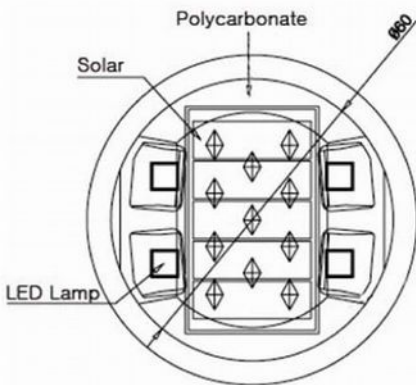

SPECIFICATIONS

- Technologie..... Active photovoltaic LED
- Dimensions..... R64 x H40 mm
- Poids 180g
- Composants: Solar Cell & I.C (Integrated Circuit)
covered with U.V coated Polycarbonate
(Super – intensity)
- Ossature Coque en Inox
- LED's 4 pièces
- LED couleurs disponibles Blanc, rouge, bleu, jaune
- LED output..... 5000 mcd
- LED output frequency Steady or flashing
- LED visibility Up to 500 meters
- Activation..... Photo sensor
- Storage DeviceSuper Capacitor
- Capacitor cavity120F/2.3V
- Surcharge admissible 9,000kg/cm
- Conditions d'enselement Pluie 8 h/jours ,2 h/j de soleil
- Durée de Vieas Capacitor go \approx 273Years
- Lighting time12~16hours (When cap full charged)
- Classement IP..... IP 68
- Output on full charge Up to 11~12 hours
- Température d'utilisation ... -40C to +80C
- Garantie 2 ans